


TECHNICAL SPECIFICATION

DESCRIPTION : 3,3 lt PP ROUND PAIL

Tolerances:

Weight / Volume : $\pm$ % 5
 Thickness : $\pm$ 0,1mm
 Dimensions : $\pm$ 1mm

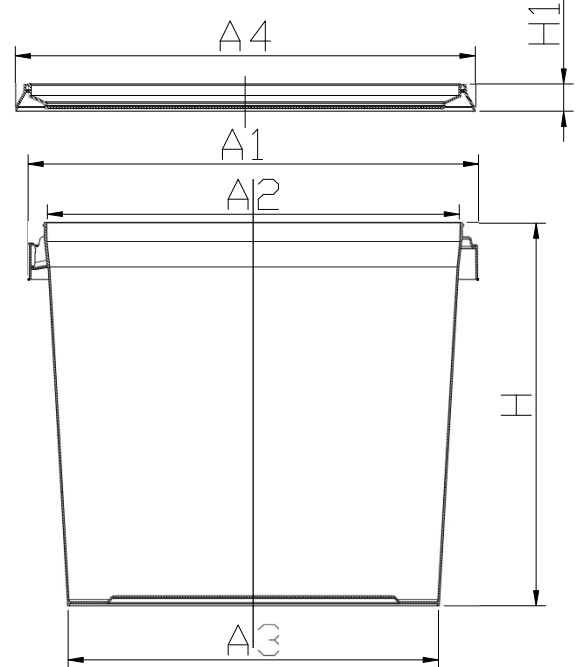

	PAIL EY - 33G		LID EY - 33 GK
VOLUME TO RIM	3.434 lt.		-----
VOLUME UNDER LID	3.266 lt.		-----
MATERIAL	COPOLYMER PP (ANTISTATIC)		COPOLYMER PP (ANTISTATIC)
WEIGHT	Pail : 73 gr Handle : 2 gr		18,5 gr
DIMENSIONS	A1 : Ø190,14 mm A2 : Ø177,00 mm A3 : Ø160,00 mm H : 159,00 mm		A4 : Ø181,55 mm H1 : 8,40 mm
WALL THICKNESS	Wall Thickness : 0,65 mm Base Thickness : 0,75 mm		Thickness : 0,65mm
DECORATION	I.M.L. Single Side : — Double Side : — Wrap Around : ✓	OFFSET Offset : ✓ Centering : —	I.M.L. : ✓
COLORS	Transparent : — Colored : ✓		Transparent : ✓ Colored : ✓
QUANTITY PER PALLET	 2,460 units		 2,460 units
STATIC STACKING LOAD	MAX: 25 KG. Max. Top Load on bottom container at 23°C .		